


Makita®

14" 73 cc. INDUSTRIAL POWER CUTTER

FIVE STAGE FILTRATION SYSTEM WITH ADVANCED DIRECTIONAL AIR FLOW PROVIDES VERY CLEAN AIR FOR BETTER SAW PERFORMANCE

- Carburetor Engineered with Improved Deco-Valve and Metering Spring for Precise Fuel Regulation at Start Up
- Improved Ignition System with Large Flywheel and Rare Earth Magnets Create More Efficient Power
- Reinforced Aluminum Blade Guard with 70 Degrees Range of Limitless Positioning using a Marked Knob Handle
- Starter Grip Decompression Valve for Faster Starting

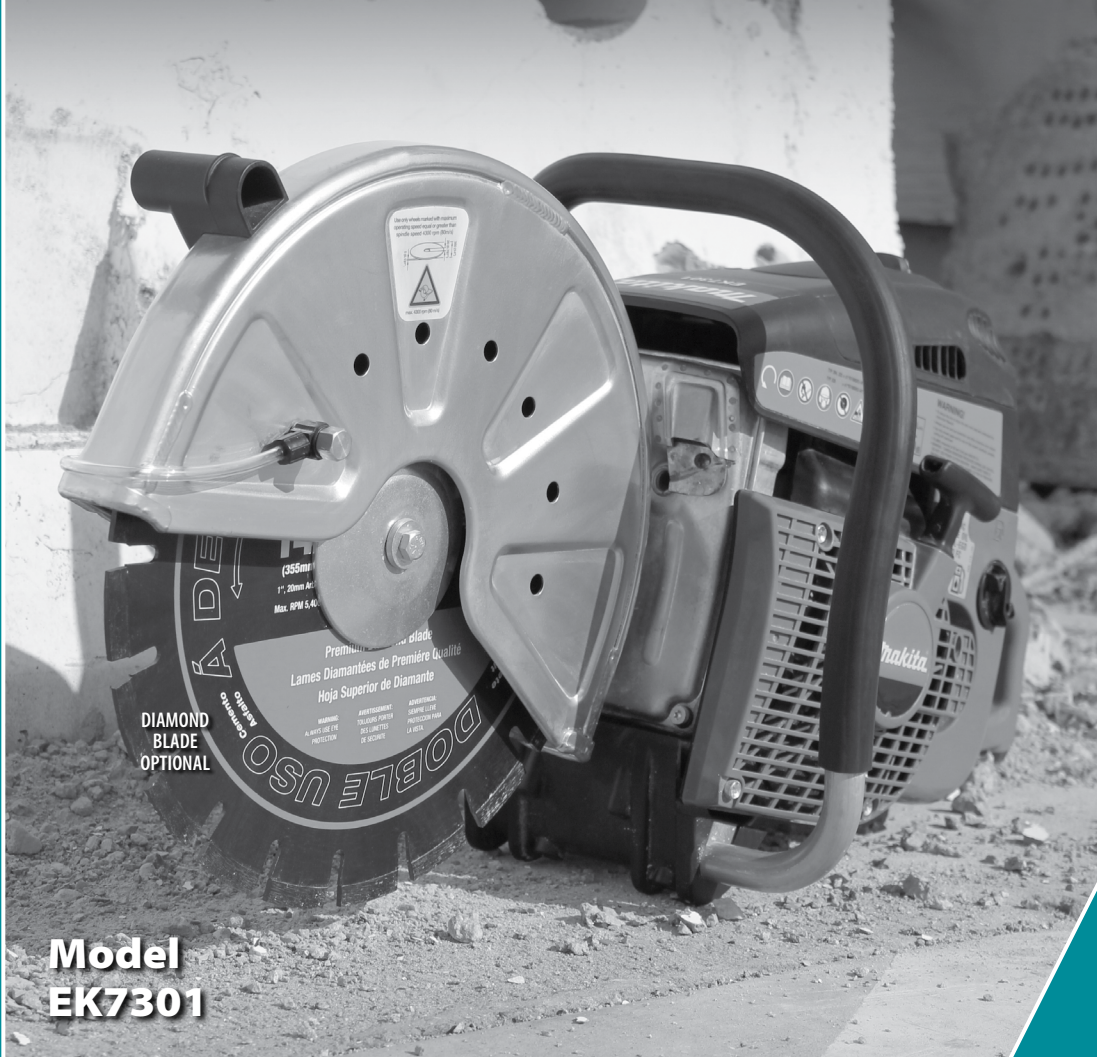

**Model
EK7301**

PERFORMANCE



Five-stage filter system w/ advanced directional air flow ensures clean air for added performance & long engine life

POWER




Ignition coil with start-support function stores electrical energy each pull for easier start ups

EFFICIENCY



SLR muffler recycles unburned fuel vapor, reducing scavenging-losses up to 15% improved consumption

VERSATILITY



Change blade from central to outbound flush position for lateral cuts in less than 2 minutes

INCREASED PERFORMANCE.

14" 73 cc. INDUSTRIAL POWER CUTTER

Model EK7301

FEATURES & BENEFITS

- Five-stage, foam-paper-nylon system with advance directional air flow provides cleaner air for better saw performance
- Improved ignition system with larger flywheel and rare earth magnets create more efficient power
- Cutting arm position changes simply from center position to flush (outboard) position allowing cuts directly adjacent to curb edges, wall or directly above the ground
- On-Off-Choke operation switch on a single lever for operator convenience
- Cushioned operator grips with 4 vibration-absorption rubber buffers for increased operator comfort
- Microchip-controlled carburetor designed to compensate engine timing according to work load
- Aluminum guard and wheel pressure plates to reduce weight
- Starter grip decompression valve for faster starting
- Water kit is assembled to saw and can be used with garden hose, gravity tank or pressure tank
- 2-mass dampening system provide reduced vibration to operator



STANDARD EQUIPMENT

- Universal displacement (965-210-222)
- Torx key (940-827-000)
- Screwdriver (944-827-001)
- Adapter ring (20mm to 1") (394-2280121)

SPECIFICATIONS

Engine displacement	4.5 cu.in. (73 cc.)
Maximum power	5.1 HP / 3.8kW
No load speed	9,350 RPM
Fuel mix	50:1
Fuel tank capacity	37 oz.
Wheel: max spindle speed	4,300 RPM
Wheel diameter	14"
Arbor	20mm
Dry weight	22 lbs.
Shipping weight	28 lbs.
UPC code	088381-330510

OPTIONAL ACCESSORIES

- Dolly with water tank (DT2000)



Model EK7301



Makita offers a wide variety of POWER CUTTER accessories. For a complete listing, please refer to the Makita General Catalog or visit our website at makitatools.com, or call 1-800-4MAKITA.

All specifications subject to change without prior notice. All models and accessories subject to stock on hand.
NTF-0112-400 MA-0953-12



Makita U.S.A., 14930 Northam St., La Mirada, CA 90638

"The Makita Teal color is the registered trade dress of Makita Corporation."